


**aqua·step®**

Size: 1200 x 167 mm / 47,24 x 6,57 inches

Thickness: 8 mm / 0,31 inches

Box: 8 planks / 1,60 m<sup>2</sup> / 17,26 sq. ft.

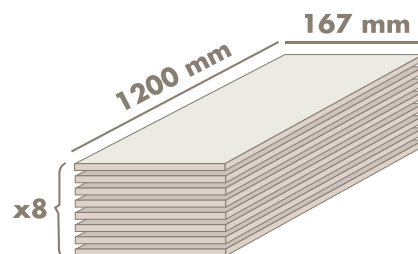

	NORM	UNIT	STANDARD	RESULT
	NORM	EENHEID	STANDAARD	RESULTAAT
	NORME	UNITÉ	STANDARD	RÉSULTAT
	NORM	EINHEIT	STANDARD	RESULTAT
	NORMA	UNIDAD	STANDARD	RESULTADO
ABRASION   slijtvastheid   usure   Abrieb   abrasión	EN13329	IP	>= 4000	4800
IMPACT   impact   impact   StoB   impacto	EN13329	newton	>= IC2	IC3
STAIN   vlekken   taches   Flecken   manchas	EN438-2	class	>= 4	5
UV LIGHT   UV licht   lumière UV   UV Licht   luz UV	EN ISO 105-B02	class	>= 6	7
SURFACE SOUNDNESS   oppervlaktetreksterkte   arrachement de la surface   arranque de la superficie	EN13329	N/mm <sup>2</sup>	>= 1,00	1,91
STATIC INDENTATION   statische indringing   poinçonnement après charge statique   huella residual tras la aplicación de una carga estática	EN 433	mm	<= 0,01	< 0,01
CASTOR CHAIR EFFECT   stoel op wielen   chaises à roulettes   Stuhllolleneignung   silla con ruedas	EN425		no damage	no damage
FURNITURE LEG EFFECT   tafelpoot   pied de meuble   Druckfestigkeit   mobiliario	EN424		no damage	no damage
THICKNESS SWELLING   zwellung   gonflement   Quellung   hinchazón	EN13329	%	<= 18	0
SLIP RESISTANCE   slijpvastheid   résistance anti-dérapage   Schleuderresistenz   resistencia al antideslizante	EN13893	μ	>= 0,3	0,46
THERMAL RESISTANCE   thermische weerstand   dissipation thermique   thermische Resistenz   resistencia al termodinámica	ISO8302	m <sup>2</sup> K/W	< = 0,15	0,048
FLOOR HEATING   vloerverwarming   chauffage au sol   Fussbodenheizung   calefacción por el suelo	water-based		OK	OK (max 28°C)
FIRE RESISTANCE   brand weerstand   résistance au feu   Feuerresistenz   resistencia al fuego	EN13501-1	class	C <sub>f</sub> /s <sub>1</sub>	C <sub>f</sub> /s <sub>1</sub>
BENDING STRENGTH   treksterkte   traction   Zugstarke   tracción	EN319	kg/lm		425
SCRATCH RESISTANCE   krasvastheid   résistance aux griffes   Kratzfestigkeit   resistencia al zarpazo	EN13329	newton	>= 3	3,75
DIMENSIONAL STABILITY   dimensionele stabiliteit   stabilité dimensionnelle   dimensionale Stabilität   estabilidad dimensionales	EN13329	mm	<= 0,90	0,04
FORMALDEHYDE EMISSION	EN717-1	mg/m <sup>3</sup>	<= 0,124	0
PENTACHLOROPHENOL EMISSION	EN12673	mg/m <sup>3</sup>	0	0
SOUND TRANSMISSION   geluidstransmissie   transmission du son   Trittschall   transmisión acústica	ISO 140-8/717-2	dBΔL <sub>w</sub>	>= 22	28
SOUND TRANSMISSION   geluidstransmissie   transmission du son   Trittschall   transmisión acústica	ISO 140-8	dBΔL <sub>lin</sub>	>= 10	14
SOUND REFLECTION   geluidsreflectie   reflexion du son   Raumschall   reflexión acústica	EPLF 021029-3	sone-bark/bark	5/8	3,2/8

(\*) 8 mm Aqua-Step + 3 mm foam